


Smart Interactive Display

MI-3575-T-X

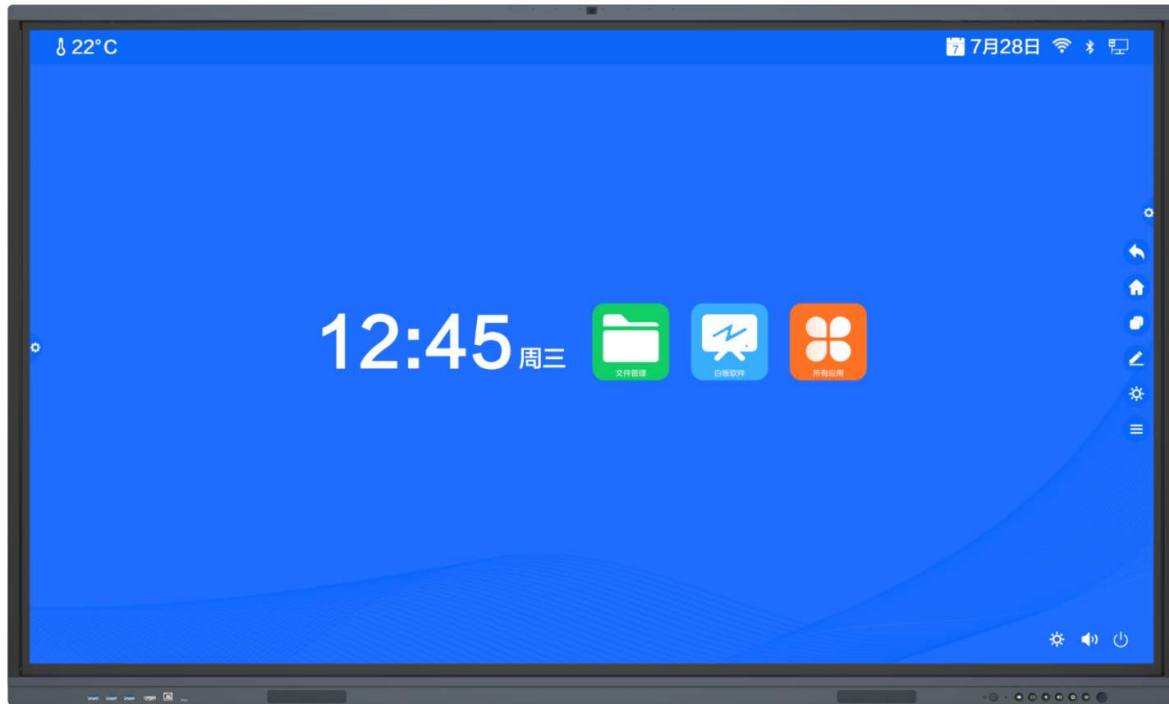

Specifications

Model	MI-3575-T-X
Panel	
Backlight	DLED backlight
Panel size	75 inches
Resolution	3840*2160
Brightness (cd/m ²)	450cd/m ²
Contrast ratio	4000:1
Response time (ms)	≤6ms
Color support	1.07 billion colors
Viewing angle (H/V)	178°/178°
Android	
CPU architecture	GK6760V100
CPU operating frequency	Octa-core A55_1.2Ghz
RAM/ROM	DDR4: 8GB eMMC: 128GB
System version	Android 14.0

Touch	
Touch control	Contactless IR sensor, supports 20-point touch
Touch precision (mm)	±1
Glass	4mm tempered glass, level 7 on Mohs hardness scale, anti-glare
Response time (ms)	≤6ms
Input method	Opaque objects (e.g. fingers, pens)
Interface	
Front Interface	1*HDMI IN、1*Touch USB、1*Type C、3*USB 2.0
Rear Interface	1*RJ45、1*HDMI IN、1*RS232、2*USB 2.0、1*TF card、1*OPTICAL OUT&SPDIF、1*LINE_OUT & EARPHONE、1*Touch USB
Audio	
Speaker	2×20W
NFC	
NFC	Support NFC screen sharing
Camera	
Pixel	48MP
Wi-Fi	
Configuration	Wi-Fi 5, supports 5G/2.4G
Performance	0~12m distance in open space
Bluetooth	
Version	5.0
Performance	12m transmission distance in open space
OSD	
Language	English and Multi Language Support
VESA	
Wall mount hole (mm)	600*400
General	
Power input	AC 100 to 240V, 50/60Hz
Overall power consumption (W)	≤260 (without OPS)
Standby power consumption (W)	<0.5
Operating temperature	0°C to 40°C
Operating humidity	10% to 80% RH, non-condensing
Storage temperature	-20°C to 60°C
Storage humidity	10% to 90% RH, non-condensing
Product dimensions (W*H*D)(mm)	1706*1027*116

Packaging dimensions (W*H*D)(mm)	1838*220*1153
Weight (kg)	Net weight: 60.5 Gross weight: 72
Accessories included	1*power cable, 2*stylus, 1*quick guide, 1*IR remotecontroller,1* wall mounting bracket,
*Note	*The specifications listed above may vary with device model